

## RICARDO-R4105IZLD

66 kWm at 1500 rev/min

The Ricardo diesel engines was designed in advance of today's uncompromising demands within the power generation industry and includes superior performance and reliability. R series diesel engine is a four-stroke, vertical water-cooled, inline and direct injecting combustion chamber type, high-speed diesel engine.

Their premium design and specification features provide economic and durable operation as well as exceptional power to weight ratio, improved serviceability, low gaseous emissions, overall performance and reliability essential to the power generation market.

### Introduction to Model Naming

R 6 100 Z D 1-2

⑦ ⑥ ⑤ ④ ③ ② ①

①: distinguish symbol, expressed with number sequence

②: version symbol, expressed with number sequence

③: uygulama özelliği sembolü, alfabeyle ifade edilir

no alphabet: for common usage; T: for tractor; G: for

engineering machinery; Q: for

vehicle; D: for generating set; C: for marine usage; P: for

power take-off unit

④: construction feature symbol, expressed with alphabet; no

alphabet: for natural aspirated

model; Z: for turbocharged model.

⑤: cylinder bore (mm)

⑥: cylinder number

⑦: series symbol; stand for imported from RICARDO

### General Data

#### 1. Intake and Exhaust System

- Intake pipe - Aluminum single block type
- Exhaust pipe - A single block cast one
- Air filter - Single stage paper filter element style  
- Double stages paper filter element style
- Silencer
- Turbocharger

#### 2. Fuel System

- Fuel delivery pump
- Fuel filter - Brand: BALDWIN  
- Model: Filter1-BF9853  
Filter2-BF9821
- High pressure pump - type A
- Governor - Mechanics/Electronics
- Injector - Spring low installed and low inertia types  
- J series and S series injector

#### 3. Lubrication System

The engine is lubricated by pressure oil combined with splash oil.

- Oil pump - gear type oil pump
- Overload overflow valve
- Oil filter - JX0811A, J1012B type for engine  
lubricating oil  
- JO506 type for turbocharger lubricating oil
- Oil cooler - pipe & shell type oil cooler

#### 4. Cooling System


- Forced water cooling
- Radiator
- Water pump fan
- Thermostat
- Oil cooler

#### 5. Electrical System

Two types electrical system: 12 V and 24 V, all are single wire system with negative pole grounded.

- Battery - should be installed near the starting motor to avoid voltage drop
- Silicon rectified dynamo
- Voltage regulator - keep the voltage at the range of 13.5 - 14.5 V or 27 - 29 V.
- Starting Motor - full closed direct current series excitation motor

### General Dimensions

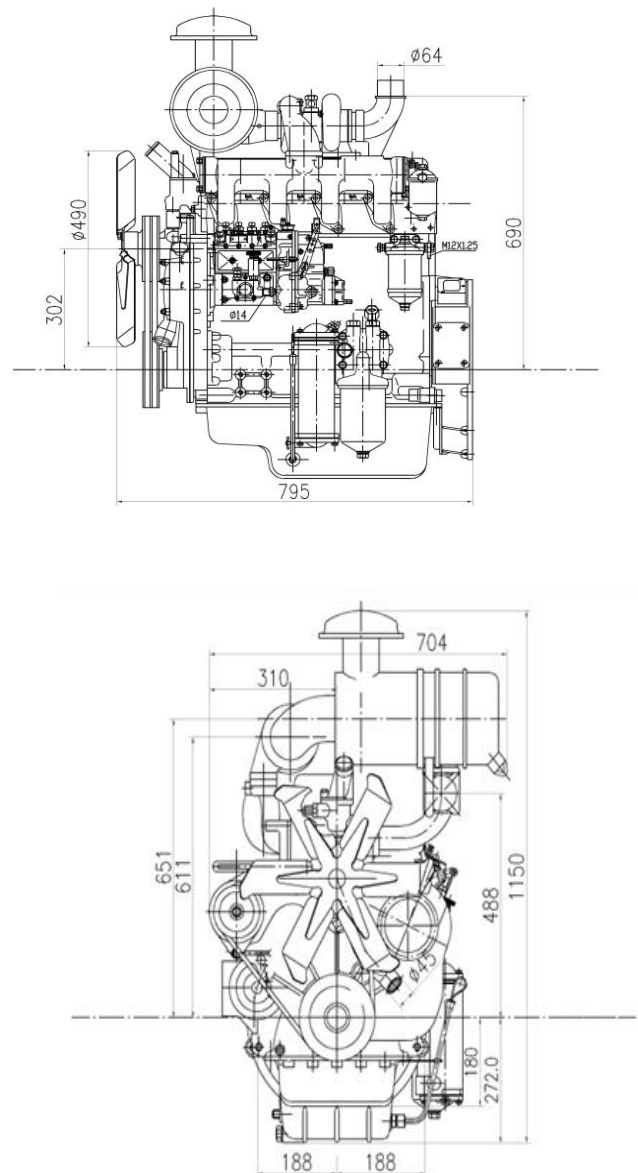

# **RICARDO-R4105IZLD**

66 kWm at 1500 rev/min

**Technical Data**

**General**

Power, Standby 1500 rpm ..... 74 kWm  
 Power, Prime 1500 rpm ..... 66 kWm  
 Cylinder Volume ..... 4.5 liter  
 Number of Cylinders and Type .....4 order  
 Cylinder Sequence ..... 1-3-4-2  
 Aspiration and Cooling ..... Turbocharged /Aftercooler  
 Engine RPM ..... 1500rpm  
 Bore and Stroke ..... 105x130 mm x mm

**Intake and exhaust system**

Intake Air Capacity ..... 6.7 m<sup>3</sup>/min  
 Exhausted Gas Capacity ..... 14 m<sup>3</sup>/min

**Fuel system**

Fuel Tank Capacity ..... 150 liter  
 Governor Type ..... Mechanics/Electronics

R4105IZLD (1500 rev/min) Fuel Consumption		
Power Rating	g/kWh	Litres/hr
At 100% of Prime Power Rating	231	17.4
At 75% of Prime Power Rating	229	12.9
At 50% of Prime Power Rating	232	8.7
At 25% of Prime Power Rating	235	4.4

**Lubrication System**

Oil Capacity ..... 13 liter

**Cooling System**

Water Capacity  
 (Radiator and Engine) ..... 68 liter

**Weight**

Weight ..... 440 kg